

High Performance Optical Amplifier

AT5000 EDFA Series

- **Video-Overlay
for FTTx Applications**
- **Up to 32 Output Ports**
- **Low noise, High
Performance**
- **Intuitive Front Panel
LCD Display**
- **Adjustable Output**
- **Universal Management
with Craft Interface**
- **SNMP Management**



AT5000 1RU or 2RU Erbium-Doped Fiber Amplifier (EDFA) offers a flexible and scalable optical amplification for high quality video transmission in CATV networks. Together with ACT 1RU 1550nm transmitter, the AT5000 EDFA provides an ideal video overlay solution in high density FTTX networks to bring the video services to business and home premises.


AT5000 EDFA series simplifies the application by offering low noise, high output power, and intuitive front panel LCD display to make operator's life easier. The optical amplifier is packaged in a self-contained 19" sub-rack of 1 or 2 RU with universal mains power supply and SNMP management.

The optical output power level can be ordered from 13 dBm to 26dBm with variable output features from 20dBm up. Multiport EDFAs accommodates up to 16 output ports in 1RU setting and 32 output ports in 2RU setting. Combined with our AT5000 1550nm direct or externally modulated laser transmitter, MSOs can quickly deploy and activate advanced multi-media services in long distance video transmission and high subscriber count FTTH networks.

Key Features

- Low noise, high performance
- Suitable for analog and digital CATV systems, DOCSIS, FTTH and more applications
- Suitable for 1550 nm DWDM applications for multiple wavelengths on single fibre
- Nominal output powers from 13dBm to 26dBm per port
- Adjustable output power
- Extend analog and digital CATV to suit long distance feeders or larger FTTH distribution systems
- Local or remote monitoring and configuration
- SNMP/HTTP monitoring, management and control

Application Diagram

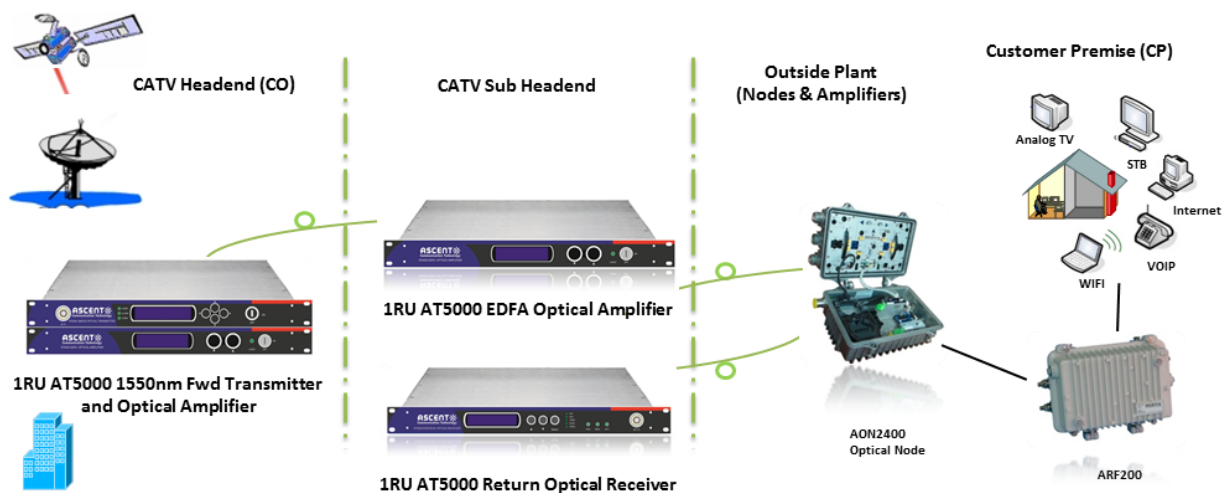

Specifications

AT5000 EDFA Erbium-Doped Fiber Amplifier - 19" 1RU

Item	Description
Operating Wavelength	1540 nm to 1563 nm
Input Power	-8 dBm to +10 dBm, +3 dBm typical
Maximum Output Power	22 dBm per port (adjustable -3dB)
Maximum Output Ports	16 (SC/APC), 32 (LC/APC)
Output Power Stability	±0.3 dB
Noise Figure (PIN = 0 dBm)	<5 dB (o/p < 27 dBm) <6 dB (o/p < 40 dBm)
Polarization Dependence Loss	0.3 dB
Polarization Dependence Gain	0.4 dB
Polarization Mode Dispersion	0.5 ps
Input / Output Isolation	30 dB
Return Loss	45 dB
SNMP	RJ45
Serial Interface	RS232
Power Supply	AC: 90 V to 265 V DC: -48 V
Power Consumption	50 W max. (o/p < 27 dBm) 80 W max. (o/p < 40 dBm)
Operating Temperature	-5 °C to +65 °C
Storage Temperature	-40 °C to +80 °C
Operating Humidity	-5 % to 95 % RH (non-condensing)
Dimensions (W x D x H)	483 mm × 368 mm × 44 mm
Weight	≤6 kg

Ordering Information

AT 5000 Series 1RU Optical EDFA Ordering Information																																																							
AT-	5X-	EDFA-	XX-	XX-	XX-	XX-	X-	X																																															
<table><tr><th></th><th>Gain Type</th></tr><tr><td>50</td><td>Standard</td></tr><tr><td>51</td><td>Gain Flattened</td></tr><tr><td>53</td><td>Raman</td></tr></table>			Gain Type	50	Standard	51	Gain Flattened	53	Raman	<table><tr><th></th><th>Output Power</th></tr><tr><td>13</td><td>13dBm</td></tr><tr><td>16</td><td>16dBm</td></tr><tr><td>17</td><td>17dBm</td></tr><tr><td>18</td><td>18dBm</td></tr><tr><td>19</td><td>19dBm</td></tr><tr><td>20</td><td>20dBm</td></tr><tr><td>21</td><td>21dBm</td></tr></table>			Output Power	13	13dBm	16	16dBm	17	17dBm	18	18dBm	19	19dBm	20	20dBm	21	21dBm	<table><tr><th></th><th>Optical Connector</th></tr><tr><td>SC</td><td>SC/APC</td></tr><tr><td>LC</td><td>LC/APC</td></tr></table>			Optical Connector	SC	SC/APC	LC	LC/APC	<table><tr><th></th><th>Power Supply</th></tr><tr><td>-</td><td>Default Single PS</td></tr><tr><td>2</td><td>Dual PS for multiple output version</td></tr></table>			Power Supply	-	Default Single PS	2	Dual PS for multiple output version	<table><tr><th></th><th>Optical Switch or Receiver</th></tr><tr><td>-</td><td>No Optical Switch or RX</td></tr><tr><td>S</td><td>Built-in Optical Switch</td></tr><tr><td>R</td><td>Built-in Optical RX</td></tr><tr><td>O</td><td>Built-in Optical Switch & RX</td></tr></table>			Optical Switch or Receiver	-	No Optical Switch or RX	S	Built-in Optical Switch	R	Built-in Optical RX	O	Built-in Optical Switch & RX
	Gain Type																																																						
50	Standard																																																						
51	Gain Flattened																																																						
53	Raman																																																						
	Output Power																																																						
13	13dBm																																																						
16	16dBm																																																						
17	17dBm																																																						
18	18dBm																																																						
19	19dBm																																																						
20	20dBm																																																						
21	21dBm																																																						
	Optical Connector																																																						
SC	SC/APC																																																						
LC	LC/APC																																																						
	Power Supply																																																						
-	Default Single PS																																																						
2	Dual PS for multiple output version																																																						
	Optical Switch or Receiver																																																						
-	No Optical Switch or RX																																																						
S	Built-in Optical Switch																																																						
R	Built-in Optical RX																																																						
O	Built-in Optical Switch & RX																																																						
<table><tr><th></th><th>Output Ports</th></tr><tr><td>01</td><td>1 Optical Output</td></tr><tr><td>02</td><td>2 Optical Outputs</td></tr><tr><td>04</td><td>4 Optical Outputs</td></tr><tr><td>08</td><td>8 Optical Outputs</td></tr><tr><td>16</td><td>16 Optical Outputs</td></tr><tr><td>32</td><td>32 Optical Outputs</td></tr></table>					Output Ports	01	1 Optical Output	02	2 Optical Outputs	04	4 Optical Outputs	08	8 Optical Outputs	16	16 Optical Outputs	32	32 Optical Outputs	<table><tr><th></th><th>Power Supply</th></tr><tr><td>AC</td><td>90 to 265 VAC Australia Plug</td></tr><tr><td>DC</td><td>30 to 72 VDC</td></tr><tr><td>A3</td><td>90 to 265 VAC with Continental EU Plug</td></tr><tr><td>A4</td><td>90 to 265 VAC with North America Plug</td></tr></table>			Power Supply	AC	90 to 265 VAC Australia Plug	DC	30 to 72 VDC	A3	90 to 265 VAC with Continental EU Plug	A4	90 to 265 VAC with North America Plug																										
	Output Ports																																																						
01	1 Optical Output																																																						
02	2 Optical Outputs																																																						
04	4 Optical Outputs																																																						
08	8 Optical Outputs																																																						
16	16 Optical Outputs																																																						
32	32 Optical Outputs																																																						
	Power Supply																																																						
AC	90 to 265 VAC Australia Plug																																																						
DC	30 to 72 VDC																																																						
A3	90 to 265 VAC with Continental EU Plug																																																						
A4	90 to 265 VAC with North America Plug																																																						

* The maximum optical port per 1RU is 32 x LC/APC or 16 x SC/APC. The maximum output power per port is 22dBm.

Contact ACT Sales Representative for customized output ports or more information.

Contact Information

Ascent Communication Technology Ltd

AUSTRALIA

961 Mountain Highway, Boronia
Victoria 3155, AUSTRALIA
Phone: +61-488 293 682

HONG KONG SAR

Unit 9, 12th Floor, Wing Tuck Commercial Centre
177 Wing Lok Street, Sheung Wan, HONG KONG
Phone: +852-2851 4722

CHINA

Unit 1907, 600 Luban Road
200023, Shanghai CHINA
Phone: +86-21-60232616

USA

2710 Thomes Ave, Cheyenne
WY 82001, USA
Phone: +1-203 816 5188

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

VIETNAM

15 /F TTC Building, Duy Tan Street, Cau Giay Dist.
Hanoi, VIETNAM
Phone: +84 168 481 8348

WEB: www.ascentcomtec.com **EMAIL:** sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.

Copyright © 2015 Ascent Communication Technology Limited. All rights reserved.

Ver. ACT_AT50_EDFA_Series_Datasheet_V1g_Dec_2017